




COMANSA

SA·257/D


montaje instantáneo • fast erection • montage ultra-rapide • schnellaufbaukran

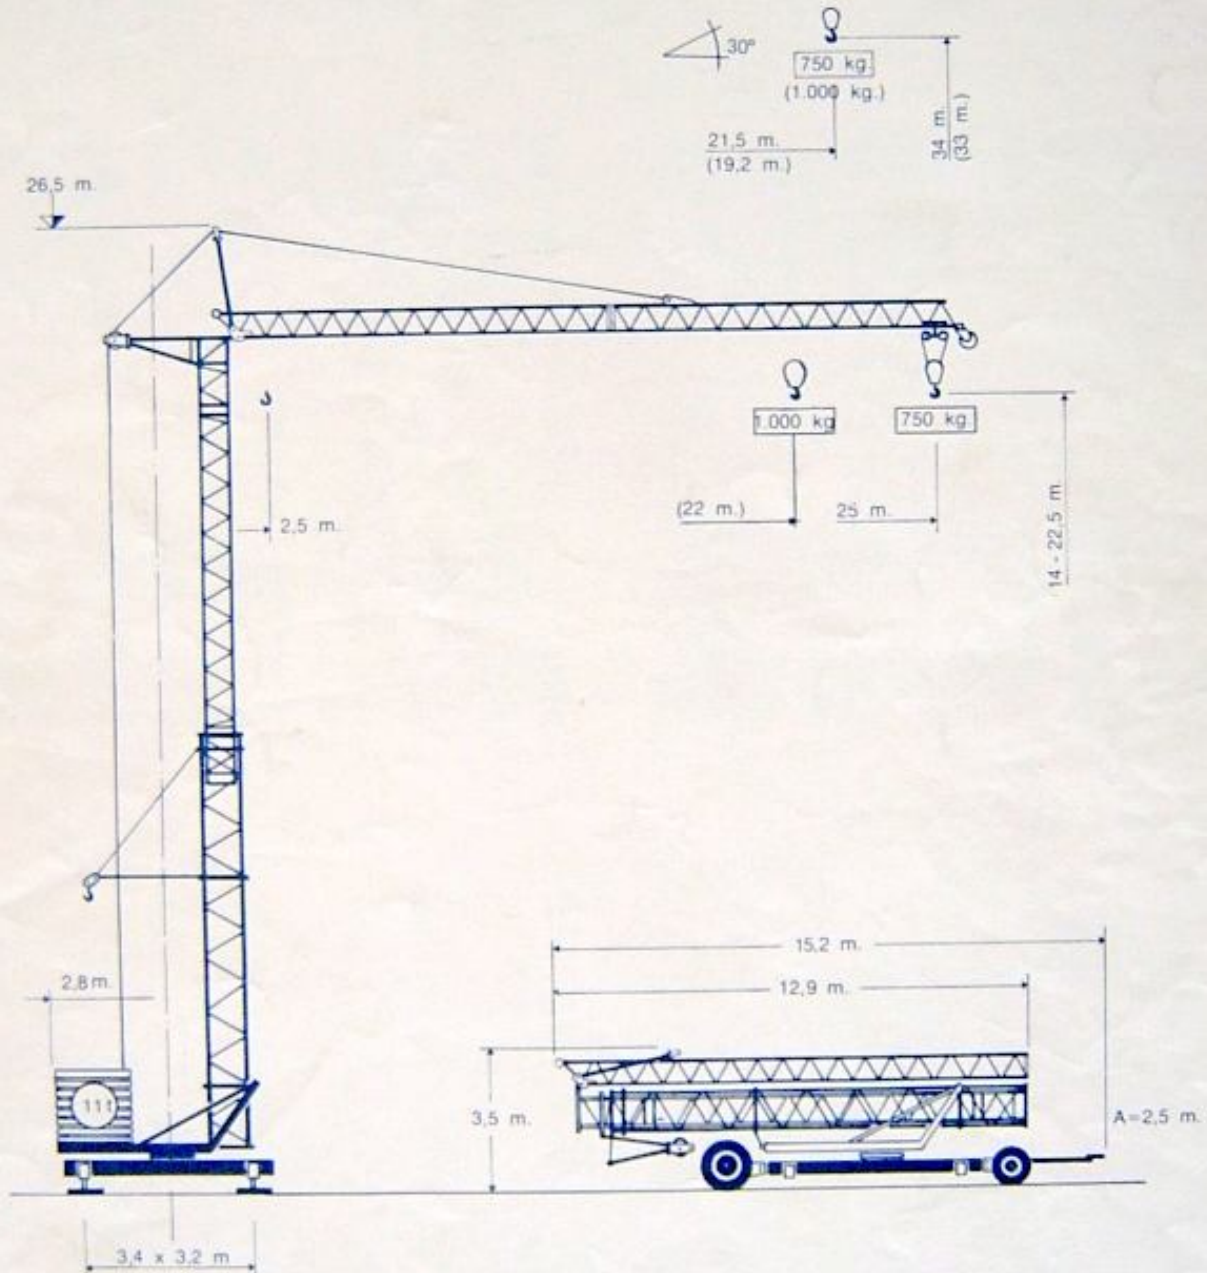



La altura es aproximada con carro en punta y longitud máxima de pluma.
 The height under hook is approximate. Trolley at longest jib end. Hook as per drawing.
 La hauteur est approximative. Chariot en pointe de la flèche la plus longue. Crochet dans la position représentée.
 Die Hubhöhe ist ungefährt, mit der Laufkatze an der Ausleger Spitze und die grösste Ausladung.

DIN 15018 H1B3





kg	2000	1645	1500	1385	1190	1045	925	830	750
m	11,1	13	14	15	17	19	21	23	25
kg	2000	1870	1500	1360	1190	1060	1000		
m	12,3	13	15,6	17	19	21	22		







CC - 2/A
1,5 CV.
30 m/mn.






G - 20
2 CV. cc.
0,2 r.p.m 0,2 → 1 r.p.m.






 OPCIONAL OPTIONAL EN OPTION KAUFOPTION
TR - 12
2 x 1,5 CV.
25 m/mn.

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	220/380 V.
Sección de cable Cross section of cable Section du câble Kabelquerschnitt	4x16 mm ²
Potencia total de motores Total motor output Puissance totale des moteurs Gesamtmotorenleistung	A) 11 ó 14 CV. B) 13,5 ó 16,5 CV.
Reacción máx. por esquina en servicio Max. corner pressure in operation Réaction max. par angle en service Max. Ecklast in Betrieb	13,5 t.
Peso de la construcción Dead weight Poids de la construction Konstruktionsgewicht	8,5 t.

A			
CE - 47/A			
7,5 CV.			
20	40		
			
1500	750		
			

A			
CE - 47/A			
7,5 CV.			
5	20	40	
			
1500	1500	750	
			

B			
CE - 47/B			
10 CV.			
20	40		
			
2000	1000		
			

B			
CE - 47/B			
10 CV.			
5	20	40	
			
2000	2000	1000	
			

Reserva de modificaciones.-Subject to modifications.-Modifications réservées.-Konstruktionsänderungen vorbehalten.



COMANSA